Holding Tank Vent Filter

waveair™

Keeping our oceans and waterways clean



waveair™ filters out the foul smells expelled from waste water and sewage holding tank vents


waveair™ Many boaters will recognise the distinctive 'below decks' odour encountered onboard.

waveair™

- specifically targets Hydrogen Sulphide (H_2S)
- uses a *new* specialised filter media technology to maximise the capacity of the filter.
  - large pore volume and
  - a high surface area of the media
- crucial for safety on board where gas heavier than air can accumulate in low-lying areas.
- for some people, a combination of unpleasant odour and a boat's motion can exacerbate sea sickness**.
- is available in 2 sizes to suit a wide range of tanks
- Waveair Micro at 200mm long and Waveair at 430mm long
- 16, 19 and 25mm hose connections are available for both models

Waveair Tank Vent Filter Models and Accessories

Pt #	Model	Hose Tail Connectors
WA16	Waveair Filter, brackets & hose tails	16mm
WA19	Waveair Filter, brackets & hose tails	19mm
WA25	Waveair Filter, brackets & hose tails	25mm
WAC	Waveair Replacement Filter	
WAM16	Waveair Filter, brackets & hose tails	16mm
WAM19	Waveair Filter, brackets & hose tails	19mm
WAM25	Waveair Filter, brackets & hose tails	25mm
WAMC	Waveair Micro Replacement Filter	

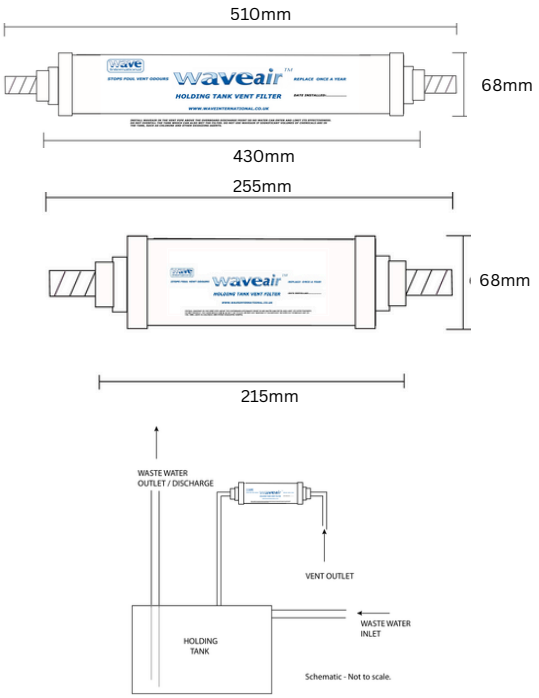

N.B. This product should not be used in conjunction with onboard sewage treatment systems or if significant volumes of chemicals, such as chlorine and other oxidising agents, may enter the tanks.

***NOAA (National Oceanic and Atmospheric Administration) National Oceanic Service says of motion sickness that "a person's symptoms can be magnified by strong odours".*

BRITISH MARINE LEADING THE INDUSTRY

SUPERYACHT UK

For more information please contact your local Wave distributor, visit: www.waveinternational.co.uk or Call +44 (0)1476 861 717

Wave International

Pollution Control Technology